

**1. PRODUCT NAME**

**Base 2000™ Wall Base, 2.5” Cove**


**2. COMPANY INFORMATION**

Flexco Corporation  
 1401 East 6<sup>th</sup> Street  
 Tuscumbia, AL, USA 35674  
 Phone: (256) 383-7474; (800) 633-3151  
 Fax: (256) 381-0322; (800) 346-9075  
 Email: [info@flexcofloors.com](mailto:info@flexcofloors.com), [technical@flexcofloors.com](mailto:technical@flexcofloors.com)  
 Internet: [www.flexcofloors.com](http://www.flexcofloors.com)

**3. PRODUCT DESCRIPTION**


ASTM F 1861, Type TP, Group 2, Styles B  
 Thermoplastic Rubber Formulation designed to meet or exceed the above-mentioned standard specification for Resilient Wall Base. Inside and Outside corners are available with a nominal 3” return.

B2-XX, 2 1/2” Cove



Available in 48” Lengths and 120’ Coils

**Color Sample:**

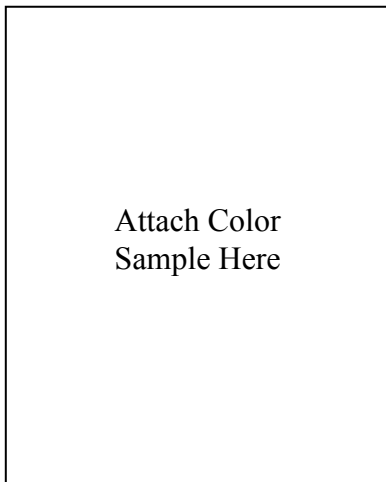

Attach Color  
Sample Here

**4. TECHNICAL DATA**

**ASTM E 84 (NFPA 255), Flame Spread** - Class A  
**ASTM E 648 (NFPA 253), Critical Radiant Flux** - Class 1 < .45 W/cm<sup>2</sup>  
**ASTM E 662 (NFPA 258), Smoke Generation** - Passes < 450  
**CAN/ULC-S102.2, Surface Burning** - FSR 10, SDC 60  
**ASTM F 1861**- Meets or exceeds all requirements including heat & light aging, chemical resistance and dimensional stability

**5. LEED INFORMATION**

May contribute to LEED® CI and NC credits MR 4, MR 5 and MR 6. For detailed LEED information, see [flexco.ecoscorecard.com](http://flexco.ecoscorecard.com)

**6. INSTALLATION**

Maintain the installation area, wall base, and adhesive between 65° F and 85° F for at least 48 hours before installation, during installation, and after the installation. Use only on structurally sound interior wall surfaces such as dry plaster, cured drywall, exterior grade plywood, concrete and masonry that are clean, smooth, dry and structurally sound. All surfaces must be free from moisture, alkali, old adhesive, dust dirt, wax, oil, grease, loose paint or plaster, nonporous wall coverings or paints and other extraneous coatings or materials that could prevent a successful bond. Any rough or uneven surfaces may telegraph through the wall base. Refer to Vinyl Wall Base Installation instructions for detailed information.

**7. ADHESIVES**

**Adhesive for Porous Substrates**

**1100 Wall Base Adhesive** is a premium solvent free Acrylic adhesive with aggressive wet suction grip for all Flexco Wall Base products. Coverages are described on the 1100 Wall Base Adhesive quick spec.

**Adhesive for Non-Porous Substrates**

Use a premium contact adhesive for installation over all non-porous substrates such as metal, FRP panels, etc.

**8. PRODUCT MAINTENANCE**

Refer to Flexco Base 2000 Wall Base Maintenance Information for detailed instructions

**9. AVAILABILITY AND COST**

Products are available through Flexco distributors. Contact Flexco Customer Service or visit [www.flexcofloors.com](http://www.flexcofloors.com) for a list of distributors.

**10. LIMITED WARRANTY**

Limited Two (2) Year Warranty

