

1. PRODUCT NAME**FlexTuft Recycled Rubber Tile****2. COMPANY INFORMATION**

Flexco Corporation
 1401 East 6th Street
 Tuscumbia, AL, USA 35674
 Phone: (800) 633-3151
 Fax: (800) 346-9075
 Email: info@flexcofloors.com, technical@flexcofloors.com
 Internet: www.flexcofloors.com

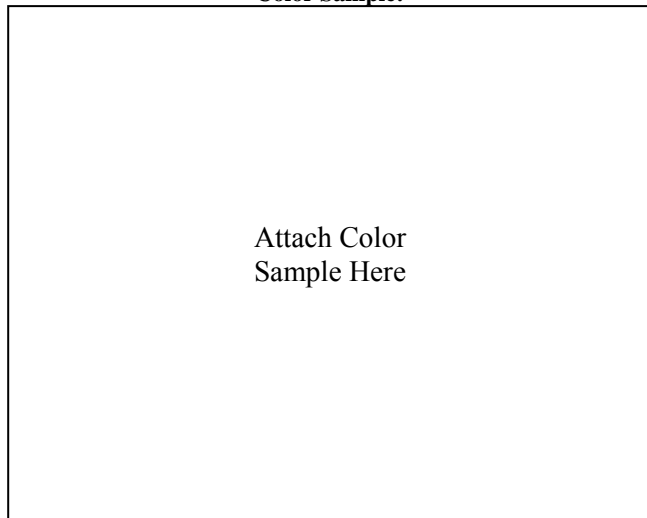
3. PRODUCT DESCRIPTION

FlexTuft Recycled Rubber Tile is a resilient rubber tile designed to meet or exceed standard specifications. Available in both Non-Vulcanized and Vulcanized product types

Non-Vulcanized FlexTuft is constructed of strips from a biased ply truck tire that are bonded to a spun bond polyester backing and then buffed to reveal the cord of the tire. It is the cords that provide the appearance of the FlexTuft. These cords are left natural in the tweed and then dyed to create the colored appearances.

Vulcanized FlexTuft is constructed in the same manner with one exception; the strips are bonded to a rubber backing through a vulcanization process.

FT-XX or FTNV-XX, 12" x 12"

Color Sample:

Attach Color
Sample Here

4. TECHNICAL DATA**Product Classification**

- ASTM does not currently offer requirements for this product category

Recycled Content

- 90% Post-Consumer

Fire Testing Information

- ASTM D 2859 (FF 1-70, 16 CFR 1630), Ignition Characteristics - Passes

5. LEED INFORMATION

May contribute to LEED® credits. For detailed LEED information, see flexco.ecoscorecard.com

6. INSTALLATION

Maintain the installation area, flooring and adhesive between 65° F and 85° F for at least 48 hours before installation, during installation, and after the installation. Perform proper moisture testing as required. All substrates must be clean, smooth, permanently dry, flat, and structurally sound. The substrate must be free of moisture, dust, sealers, paint, curing compounds, parting agents, residual adhesives, adhesive removers, hardeners, resinous compounds, solvents, wax, oil, grease, asphalt, gypsum compounds, alkaline salts, excessive carbonation or laitance, mold, mildew, any other extraneous coatings, films, materials and all other foreign matter which might interfere/restrict proper adhesive bonding. In renovation or remodel work, remove all existing adhesive residue so that 100% of the overall area of the original subfloor/substrate is exposed.

7. ADHESIVES

- 3100 Rubber Tile & Tread Adhesive
- 6100 Sports Flooring Adhesive
- 7100 Low Viscosity Epoxy Adhesive
- 7200 Urethane Epoxy Adhesive

8. PRODUCT MAINTENANCE

Refer to Flexco FlexTuft Recycled Rubber Tile Maintenance Information for detailed instructions

9. AVAILABILITY AND COST

Products are available through Flexco distributors. Contact Flexco Customer Service or visit www.flexcofloors.com for a list of distributors.

10. LIMITED WARRANTY

Limited One (1) Year Manufacturer's Warranty
 Limited Five (5) Year Wear Warranty
 Limited Lifetime Delamination Warranty

Refer to Flexco Substrate Preparation and FlexTuft Recycled Rubber Tile Installation and/or Maintenance documentation for any additional detailed information.

www.flexcofloors.com/technicalsupport/index.html

