



#197 Cove Cap (Square), 1/8"

Manufacturer

Flexco Corporation
1401 East 6th Street
Tuscumbia, AL USA 35674
Phone (800) 633-3151
Fax (800) 346-9075
Email: info@flexcofloors.com,
solutions@rhctechnical.com
Internet: www.flexcofloors.com

Features

Non-Porous
Economical
Extremely Durable
ADA Compliant
#165 Cove Cap (Square), 1/8"
Cap for coved sheet vinyl; undercut 1/8" Installation
Radius: 1 ft.
50 12-ft. sections per carton, (600 ft.)

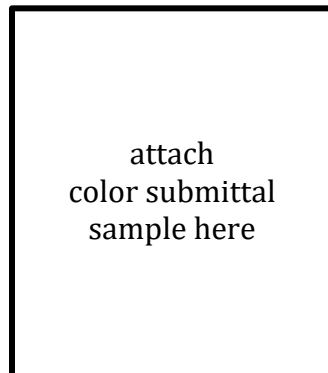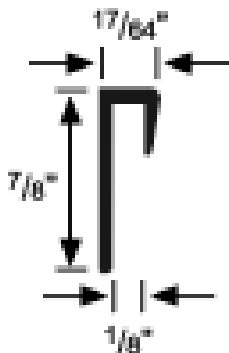

Technical Data

ASTM E84 - Surface Burning: Class A
ASTM E648 (NFPA 253) - Critical Radiant Flux: Class I,
> .045 W/cm²
ASTM E662 (NFPA 258) - Smoke Density: Passes,
<450 Acclimation Time: 48 hours
Storage & Acclimation Temperature: 65 ° - 85 ° F

Adhesives*

EN-610 Epoxy Nose Filler
Unit Size: 13.5 oz. Cartridge
VOC: < 12 g/l
1/2" bead coverage rate: 25 lin. ft. per cartridge
1/4" bead coverage rate: 50 lin. ft. per cartridge
Substrate: Porous and Non-Porous

C-630 Contact Adhesive

Unit Size: 1 Quart
VOC: 0.0 g/l
20 - 40 sq. ft. per unit
120 - 140 lin. ft. per unit

Installation*

Vinyl Accessories are designed for interior use only with temperatures maintained from 65°F (19°C) and 85°F (30°C). The flooring installer must inspect all material for manufacturing imperfections and irregularities prior to installation. Before installing, confirm accessory placement and the placement of adjoining material per design specifications.

Maintenance*

Ensure that adhesive has cured for the recommended period of time prior to maintenance. Sweep, dust, mop, vacuum or wipe material to remove any dirt, dust or debris. Mix 2-4 ounces of our recommended cleaner per gallon of clean, potable water. Use a clean mop, towel or cloth to apply cleaner to material. If necessary, scrub material while wet using a 22 gauge soft bristled scrubbing brush. Use an auto-scrubber, wet vacuum, clean mop or clean towel to remove any and all excess cleaning solution. Rinse area with clean, cool water and allow material to dry entirely.

Technical Document Support

Additional product resources and technical documents are available online at: www.flexcofloors.com
For additional technical support, send an e-mail to: solutions@rhctechnical.com

Warranty

FLEXCO Provides a 1 year Limited Warranty on all Vinyl Accessories. For additional information, see associated Warranty documents.

****For complete adhesive, installation & maintenance instructions, visit www.roppe.com***

