

1. PRODUCT NAME


Vinyl Flooring Accessories, #201

2. COMPANY INFORMATION


Flexco Corporation
 1401 East 6th Street
 Tuscumbia, AL, USA 35674
 Phone: (800) 633-3151
 Fax: (800) 346-9075
 Email: info@flexcofloors.com
 Internet: www.flexcofloors.com

3. PRODUCT DESCRIPTION

Co-Extruded Thermoplastic formulation designed to provide excellent resistance to scuffing and gouging while meeting ADA recommendations for transitions different flooring surfaces.

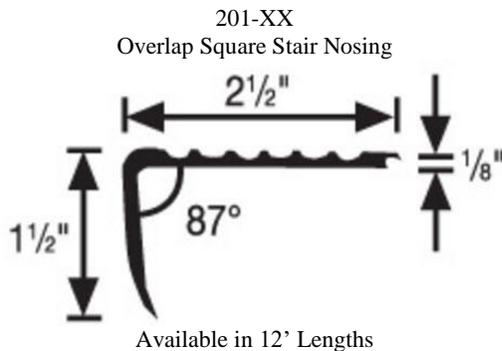

Color Sample:

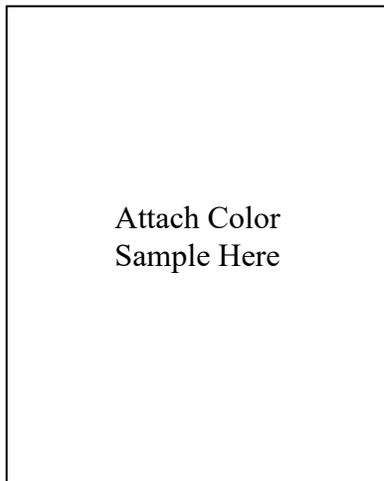

4. TECHNICAL DATA

ASTM E84 (NFPA 255) – Class A
 ASTM E 648 (NFPA 253) - Class 1
 ASTM E 662 (NFPA 258) - Passes

5. LEED INFORMATION

May contribute to LEED® CI and NC credits MR 4, MR 5 and MR 6. For detailed LEED information, see

6. INSTALLATION

Maintain the installation area, accessories, and adhesive between 65° F and 85° F for at least 48 hours before installation, during installation, and after the installation. Use only on structurally sound interior wall surfaces such as dry plaster, cured drywall, exterior grade plywood, concrete and masonry that are clean, smooth, dry and structurally sound. All surfaces must be free from moisture, alkali, old adhesive, dust dirt, wax, oil, grease, loose paint or plaster, nonporous wall coverings or paints and other extraneous coatings or materials that could prevent a successful bond. Any rough or uneven surfaces may telegraph through the wall base. Refer to Vinyl Flooring Accessories Installation instructions for detailed information.

7. ADHESIVES

Excelsior EN-610: Adhesive must be a hard-set adhesive that does not allow the material to shrink or expand after installation. Flexco does not recommend the use of “stair tread” installation tape or pressure sensitive as adequate adhesives for the installation of Flexco Vinyl Flooring Accessories. This material can allow the material to shrink or expand and create gapping. It is up to the installer to determine acceptable bond to prevent shrinking and expansion. See specific detailed nosing installation instructions in the accessories data sheet.

8. PRODUCT MAINTENANCE

Ensure that adhesive has cured for the recommended period of time prior to maintenance. Sweep, dust, mop, vacuum or wipe material to remove any dirt, dust or debris. Mix 2-4 ounces of our recommended cleaner per gallon of clean, potable water. Use a clean mop, towel or cloth to apply cleaner to material. If necessary, scrub material while wet using a 22 gauge soft bristled scrubbing brush. Use an auto-scrubber, wet vacuum, clean mop or clean towel to remove any and all excess cleaning solution. Rinse area with clean, cool water and allow material to dry entirely.

9. AVAILABILITY AND COST

Products are available through Flexco distributors. Contact your local Flexco Representative, Flexco Customer Service or by visiting www.flexcofloors.com for a list of distributors.

10. LIMITED WARRANTY

Limited One (1) Year Manufacturer’s Warranty

