

EVOLVING STYLES Rubber Flooring

Manufacturer

Flexco Corporation
1401 East 6th Street
Tuscumbia, AL USA 35674
Phone (800) 633-3151
Fax (800) 346-9075
Email: info@flexcofloors.com, solutions@rhctechnical.com

Product Description


Premium Rubber Formulation designed to meet or exceed the above-mentioned standard specification for Resilient Rubber Tile & Rubber Sheet Flooring without Backing. Material available in Smooth Tile in the Creative or Wood Elements color palette.

CE-XXX or WE-
XXX

— .125"

Available in 6" x 36", 12" x 12", 12" x 36", 18" x 18", 18" x 36", or 36" x 36" Tiles & 36" x 25' or 48" x 25' Rolls

Color Sample:

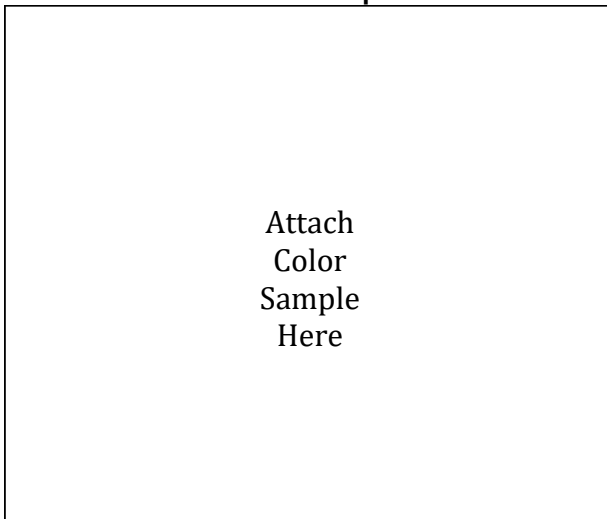

TECHNICAL DATA

- **ASTM F 1344, Rubber Floor Tile** - Class I, Type A Solid Color, Type B Through Mottled
- **ASTM F1859, Rubber Sheet without Backing** – Type I

- **ASTM 648 (NFPA 253), Critical Radiant Flux** – Class 1, >.45 W/cm²
- **ASTM 662 (NFPA 258), Smoke Generation** – Passes <450
- **ASTM D 2047, Coefficient of Friction (Slip Resistance)** - > .6
- **ASTM D 2240, Shore A Hardness** - > 85
- **ASTM G 21, Resistance to Fungi** - 0, No Growth
- **ASTM F 925, Resistance to Chemicals** - Passes, List of Chemicals Available
- **ASTM F 970, Static Load Limit** - 250 psi, Passes Max Indentation of 0.003" @ 1,100 psi
- **ASTM E 492, Impact Sound Transmission (IIC)** - 37
- **ASTM E 90, Airborne Sound Transmission (STC)** - 51
- **ASTM C 423, Sound Absorption (NRC)** - 0.05

INSTALLATION*

Rubber Tile and Sheet is designed for interior use only with temperatures maintained from 65°F (19°C) and 85°F (30° C). The flooring installer must inspect all material for manufacturing imperfections and irregularities prior to installation. Perform proper moisture testing as required. All substrates must be clean, smooth, permanently dry, flat, and structurally sound with all existing adhesive residue so that 100% of the overall area of the original subfloor/substrate is exposed. Refer to the product Installation instructions for detailed information.

APPROVED ADHESIVES*

Excelsior SP-500, Excelsior AP-520, Excelsior AW-510, Excelsior MS-700, Excelsior U-705, Excelsior EW-710

PRODUCT MAINTENANCE*

Refer to appropriate Maintenance Information for detailed instructions

LIMITED WARRANTY

Limited Ten (10) Years

**For complete adhesive, installation & maintenance instructions, visit www.flexcofloors.com*