

<b>Available Lengths</b>	50' Coil
<b>Finish</b>	7" Height x 0.080" Thickness
<b>Configuration</b>	Similarly Shaped to Traditional Wall Base
<b>ASTM E648 (NFPA 253) - Critical Radiant Flux</b>	Class 1, $\geq 0.45 \text{ W/cm}^2$
<b>ASTM E662 (NFPA 258) - Smoke Density</b>	Passes, $\leq 450$
<b>ASTM F925 - Chemical Resistance</b>	Excellent with chemicals listed in standard, Additional chemicals available via chart
<b>ASTM F1514 - Heat Stability</b>	Excellent, $\Delta E \leq 8$
<b>ASTM F1515 - Light Stability</b>	Excellent, $\Delta E \leq 8$
<b>Sustainability Information</b>	<p>Made in the U.S.A.</p> <p>Meets Buy America Act (49 CFR Part 661)</p> <p>Meets Buy American Act (41 USC §§ 8301-8303)</p> <p>Contributes to LEED v4/4.1</p> <p>FloorScore Certification</p> <p>Meets CA 01350 Requirements</p>
<b>Acclimation Time</b>	48 Hours
<b>Service &amp; Storage Temperature</b>	65° - 85° F
<i>See installation document for full installation details regarding approved substrates, job site conditions and acclimation procedures.</i>	
<b>Product Warranty</b>	5 Years
<i>See product warranty for full details regarding limitations and warranty coverage.</i>	
<b>Approved Adhesives</b>	<p>Excelsior TP-620, Pressure Sensitive Tread Tape</p> <p>Excelsior AW-510, Wet-Set Acrylic</p> <p>Excelsior C-631, Contact Adhesive</p>

---

**Technical Support**

[solutions@rhctechical.com](mailto:solutions@rhctechical.com)

---

**Product Support**


[info@flexcofloors.com](mailto:info@flexcofloors.com)

---

**Technical Documentation**

[www.flexcofloors.com](http://www.flexcofloors.com)

---

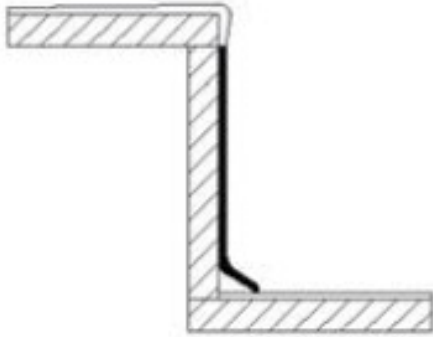

Attach Color Sample Here