

**1. PRODUCT NAME**

Vinyl Flooring Accessories, #168


**2. COMPANY INFORMATION**

Flexco Corporation  
 1401 East 6<sup>th</sup> Street  
 Tuscumbia, AL, USA 35674  
 Phone: (800) 633-3151  
 Fax: (800) 346-9075  
 Email: [info@flexcofloors.com](mailto:info@flexcofloors.com)  
 Internet: [www.flexcofloors.com](http://www.flexcofloors.com)

**3. PRODUCT DESCRIPTION**


Co-Extruded Thermoplastic formulation designed to provide excellent resistance to scuffing and gouging while meeting ADA recommendations for transitions different flooring surfaces.

168-XX  
 Smooth Carpet-to-Tile Transition

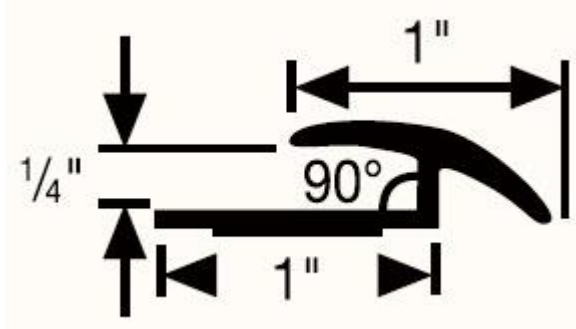

Available in 12' Lengths

**Color Sample:**

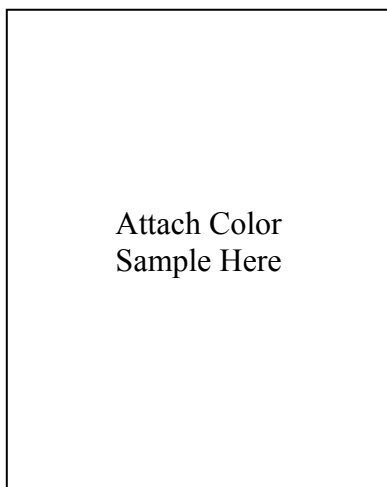

Attach Color  
 Sample Here

**4. TECHNICAL DATA**

ASTM E 648 (NFPA 253) - Class 1  
 ASTM E 662 (NFPA 258) - Passes

**5. LEED INFORMATION**

May contribute to LEED® CI and NC credits MR 4, MR 5 and MR 6. For detailed LEED information, see [flexco.ecoscorecard.com](http://flexco.ecoscorecard.com)

**6. INSTALLATION**

Maintain the installation area, accessories, and adhesive between 65° F and 85° F for at least 48 hours before installation, during installation, and after the installation. Use only on structurally sound interior wall surfaces such as dry plaster, cured drywall, exterior grade plywood, concrete and masonry that are clean, smooth, dry and structurally sound. All surfaces must be free from moisture, alkali, old adhesive, dust dirt, wax, oil, grease, loose paint or plaster, nonporous wall coverings or paints and other extraneous coatings or materials that could prevent a successful bond. Any rough or uneven surfaces may telegraph through the wall base. Refer to Vinyl Flooring Accessories Installation instructions for detailed information.

**7. ADHESIVES**

Use an adhesive designed for the application of accessories. Adhesive should be a hard-set adhesive that does not allow the material to shrink or expand after installation. Flexco does not recommend the use of "stair tread" installation tape as an adequate adhesive for the installation of Flexco Vinyl Flooring Accessories. This material can allow the material to shrink or expand and create gapping. It is up to the installer to determine acceptable bond to prevent shrinking and expansion.

**8. PRODUCT MAINTENANCE**

Use an adhesive designed for the application of accessories. Adhesive should be a hard-set adhesive that does not allow the material to shrink or expand after installation. Flexco does not recommend the use of "stair tread" installation tape as an adequate adhesive for the installation of Flexco Vinyl Flooring Accessories. This material can allow the material to shrink or expand and create gapping. It is up to the installer to determine acceptable bond to prevent shrinking and expansion.

**9. AVAILABILITY AND COST**

Products are available through Flexco distributors. Contact your local Flexco Representative, Flexco Customer Service or by visiting [www.flexcofloors.com](http://www.flexcofloors.com) for a list of distributors.

**10. LIMITED WARRANTY**

Limited One (1) Year Manufacturer's Warranty

