

Available Lengths	36", 42", 48", 54", 60", 66", 72", 78", 84", 90", 96", 102", & 108"
Finish	7" Height x 0.100" Thickness
Configuration	Similarly Shaped to Traditional Wall Base
ASTM E648 (NFPA 253) - Critical Radiant Flux	Class 1, $\geq 0.45 \text{ W/cm}^2$
ASTM E662 (NFPA 258) - Smoke Density	Passes, ≤ 450
CAN/ULC-S102.2 - Surface Burning	115 Flame Spread Rating 275 Smoke Developed Classification
ASTM F925 - Chemical Resistance	Excellent with chemicals listed in standard, Additional chemicals available via chart
<i>ASTM F925 testing is utilized to ensure flooring materials will stand up to certain household standard chemistries. Additional chemical resistance testing performed using this test method is for informational and guidance purposes only. Proper maintenance will have an effect on chemical resistance, but the best defense against a negative effect is to clean the drop/spill from the flooring surface immediately.</i>	
ASTM F1514 - Heat Stability	Excellent, $\Delta E \leq 8$
Sustainability Information	Made in the U.S.A. Meets Buy America Act (49 CFR Part 661) Meets Buy American Act (41 USC §§ 8301-8303) Contributes to LEED v4/4.1 FloorScore Certification Meets CA 01350 Requirements Meets CHPS Requirements NSF/ANSI 332 Platinum Certification HPD Available Contains No Recycled Content Red List Chemical Free
Acclimation Time	48 Hours
Service & Storage Temperature	65° - 85° F
<i>See installation document for full installation details regarding approved substrates, job site conditions and acclimation procedures.</i>	
Product Warranty	5 Years <i>See product warranty for full details regarding limitations and warranty coverage.</i>
Approved Adhesives	Excelsior TP-620, Pressure Sensitive Tread Tape Excelsior AW-510, Wet-Set Acrylic Excelsior C-631, Contact Adhesive

Technical Support


solutions@rhctechnical.com

Product Support

info@flexcofloors.com

Technical Documentation

www.flexcofloors.com

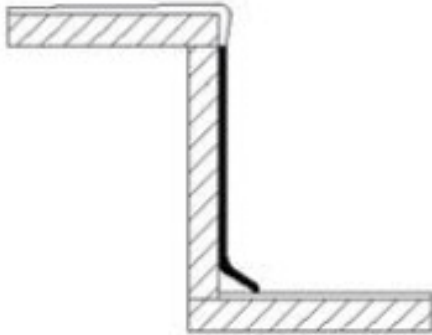

Attach Color Sample Here