


### #158, 3/8" Carpet Edge Reducer

#### Manufacturer

Flexco Corporation  
1401 East 6th Street  
Tuscumbia, AL USA 35674  
Phone (800) 633-3151  
Fax (800) 346-9075  
Email: [info@flexcofloors.com](mailto:info@flexcofloors.com),  
[solutions@rhctechical.com](mailto:solutions@rhctechical.com)  
Internet: [www.flexcofloors.com](http://www.flexcofloors.com)

#### Product Description

Co-Extruded Thermoplastic formulation designed to provide excellent resistance to scuffing and gouging while meeting ADA recommendations for transitioning different flooring surfaces

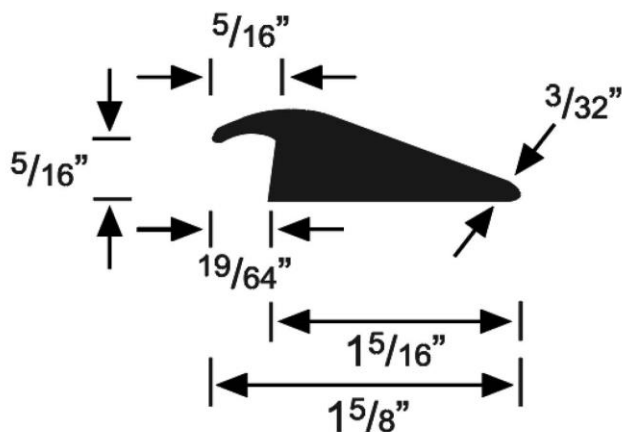

Attach  
color submittal sample  
here

#### Technical Data

ASTM E84 - Surface Burning: **Class A**  
ASTM E648 (NFPA 253) - Critical Radiant Flux: **Class I, > .045 W/cm<sup>2</sup>**  
ASTM E662 (NFPA 258) - Smoke Density: **Passes, <450**  
Acclimation Time: **48 Hours**  
Storage & Acclimation Temperature: **65 ° - 85 ° F**

#### Adhesives\*

**Excelsior EN-610, Excelsior C-630 or an approved hard set adhesive:** Adhesive should be a hard-set adhesive that does not allow the material to shrink or expand after installation. Flexco does not recommend the use of "stair tread" installation tape or pressure sensitive adhesive as adequate adhesives for the installation of Flexco Vinyl Flooring Accessories. This material can allow the material to shrink or expand and create gapping. It is up to the installer to determine acceptable bond to prevent shrinking and expansion.

#### Installation\*

Vinyl Accessories are designed for interior use only with temperatures maintained from 65°F (19°C) and 85°F (30°C). The flooring installer must inspect all material for manufacturing imperfections and irregularities prior to installation. Before installing, confirm accessory placement and the placement of adjoining material per design specifications.

#### Maintenance\*

Wipe the Vinyl Flooring Accessories with a mild solution of Neutral pH cleaner such as Excelsior NC-900 or equivalent. Do not use detergents, abrasive cleaners or "mop and shine" products as they will dull the look of the flooring.

#### Technical Document Support

Additional product resources and technical documents are available online at: [www.flexcofloors.com](http://www.flexcofloors.com)  
For additional technical support, send an e-mail to: [solutions@rhctechical.com](mailto:solutions@rhctechical.com)

#### Warranty

FLEXCO Provides a 1 year Limited Warranty on all Vinyl Accessories. For additional information, see associated Warranty documents.

\*For complete adhesive, installation & maintenance instructions, visit [www.flexcofloors.com](http://www.flexcofloors.com)