



#164 Snap-Down Super Edge

Manufacturer

Flexco Corporation
1401 East 6th Street
Tuscumbia, AL USA 35674
Phone (800) 633-3151
Fax (800) 346-9075
Email: info@flexcofloors.com,
solutions@rhctechincal.com
Internet: www.flexcofloors.com

Product Description

Co-Extruded Thermoplastic formulation designed to provide excellent resistance to scuffing and gouging while meeting ADA recommendations for transitioning different flooring surfaces

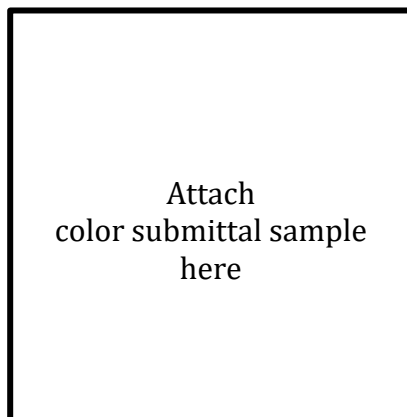

Technical Data

ASTM E84 - Surface Burning: **Class A**
ASTM E648 (NFPA 253) - Critical Radiant Flux: **Class I, > .045 W/cm2**
ASTM E662 (NFPA 258) - Smoke Density: **Passes, <450**
Acclimation Time: **48 Hours**
Storage & Acclimation Temperature: **65 ° - 85 ° F**

Adhesives*

Super Edge snaps into the 101 or 102 single flange tracks.

Installation*

Vinyl Accessories are designed for interior use only with temperatures maintained from 65°F (19°C) and 85°F (30° C). The flooring installer must inspect all material for manufacturing imperfections and irregularities prior to installation. Before installing, confirm accessory placement and the placement of adjoining material per design specifications.

Maintenance*

Wipe the Vinyl Flooring Accessories with a mild solution of Neutral pH cleaner such as Excelsior NC-900 or equivalent. Do not use detergents, abrasive cleaners or "mop and shine" products; they will dull the look of the flooring.

Technical Document Support

Additional product resources and technical documents are available online at: www.flexcofloors.com
For additional technical support, send an e-mail to: solutions@rhctechincal.com

Warranty

FLEXCO Provides a 1 year Limited Warranty on all Vinyl Accessories. For additional information, see associated Warranty documents.

**For complete adhesive, installation & maintenance instructions, visit www.flexcofloors.com*