

### PRODUCT NAME

Commercial Safety Rib Tread Square Nose (VT SN)


### COMPANY INFORMATION

Flexco Corporation  
 1401 East 6<sup>th</sup> Street  
 Tuscumbia, AL, USA 35674  
 Phone: (256) 383-7474; (800) 633-3151  
 Fax: (256) 381-0322; (800) 346-9075  
 Email: [info@flexcofloors.com](mailto:info@flexcofloors.com), [technical@flexcofloors.com](mailto:technical@flexcofloors.com)  
 Internet: [www.flexcofloors.com](http://www.flexcofloors.com)


### PRODUCT DESCRIPTION

Surface Design: Ribbed  
 Safety Strip: Available with or without 2" (50.8 mm)  
 Carborundum, Ribbed or Smooth Rubber inserts approximately 3/4" (19 mm) from Nose  
 Nose Type: Adjustable Square Nose  
 Nose Length: 2" (50.8 mm)  
 Nose Thickness: 1/4" (6.35 mm)  
 Back Thickness: 1/8" (3.2 mm)  
 Tread Depth: 12 1/2" (317.5 mm)  
 Use Rating: Commercial  
 Length: 42" (1.07 m), 48" (1.22 m), & 72" (1.83 m); 36" (.91 m) available with 50 piece minimum order

VT SN-XXX

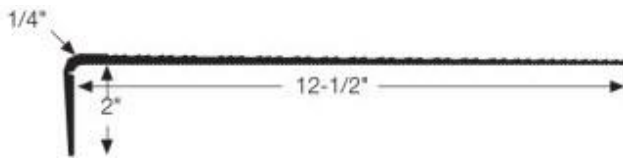

### Color Sample:

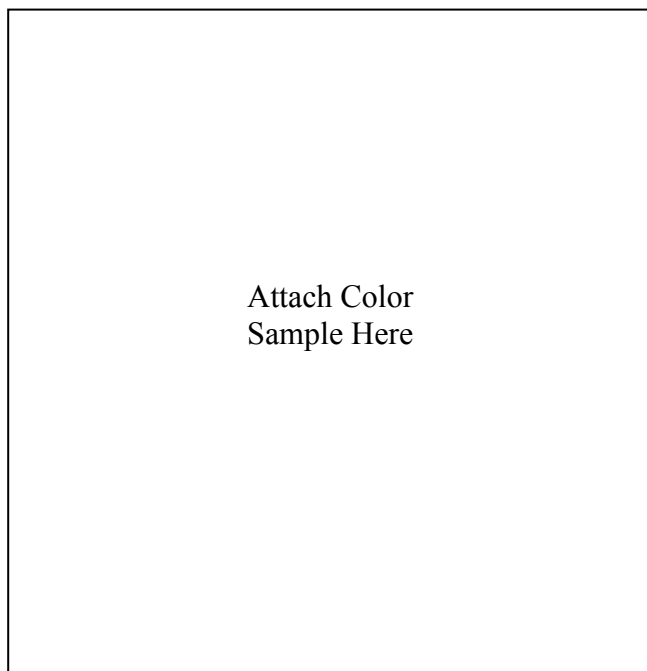

### TECHNICAL DATA

**ASTM F 2169, Resilient Stair Treads** - Type TP, Class 2  
 Embossed, Group 1 Embedded Abrasive Strips & Group 2  
 Contrasting Color for Visually Impaired with inserts  
**ASTM E 648 (NFPA 253), Critical Radiant Flux** - Class 1, > .45 W/cm<sup>2</sup>  
**ASTM E 662 (NFPA 258), Smoke Generation** - Passes, < 450  
**ASTM D 2047, Coefficient of Friction (Slip Resistance)** - > .6  
**ASTM F 925, Resistance to Chemicals** - Passes, List of Chemicals Available  
**ASTM F 1514, Heat Stability of Color** - ΔE < 8 Avg

### INSTALLATION

- We recommend Flexco Vinyl Stair Treads be installed by a competent Commercial Flooring Contractor which has previously demonstrated the capabilities to install Vinyl Stair Treads.
- We recommend the installer and/or project manager have completed some type of formal training, such as FCICA CIM Program, CFI, INSTALL and/or Manufacturer's (even competitors) training program.
- To maintain full warranties for Flexco Vinyl Stair Treads, all recommendations provided by Flexco must be followed.
- Failure to use Flexco recommended adhesives could result in voided product warranty.

### Approved Adhesives for Installation

Select the appropriate adhesive for your installation, substrate and use. With any adhesive selection ensure that proper moisture and pH testing is performed and results are below limits listed below. A bond test should be performed at least 72 hours prior to the scheduled installation to ensure the substrate is suitable.

- All installations require 5100 Tread Nose Compound
- 4100 Quik Stik Tread Tape
- 3600 Vinyl Tile & Tread Adhesive
- 7200 Urethane Epoxy Adhesive

### PRODUCT MAINTENANCE

Refer to Flexco Vinyl Stair Tread Maintenance Information for detailed instructions

### AVAILABILITY AND COST

Products are available through Flexco distributors. Contact Flexco Customer Service or visit [www.flexcofloors.com](http://www.flexcofloors.com) for a list of distributors.

### LIMITED WARRANTY

Limited One (1) Year Manufacturer's Warranty  
 Limited Five (5) Year Wear Warranty

Refer to Flexco Vinyl Stair Tread Installation or Maintenance Documentation for additional detailed information.

[www.flexcofloors.com/technicalsupport/index.html](http://www.flexcofloors.com/technicalsupport/index.html)

