
# FlexTerior™

#### METAL TREADS



Made to last, outdoors and indoors.



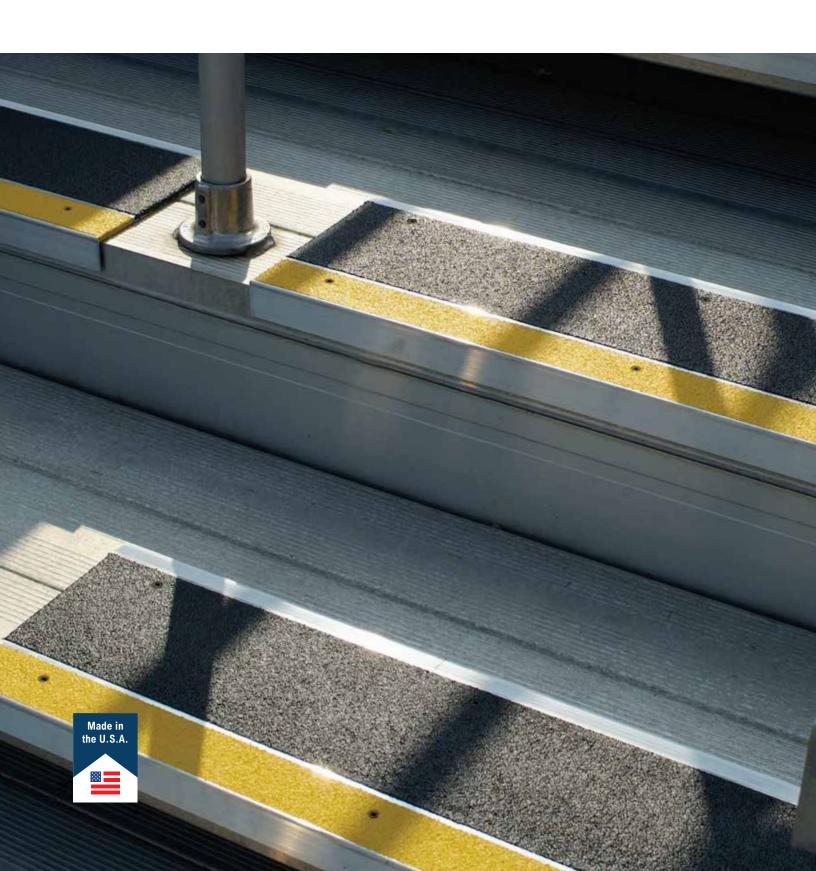

# FlexTerior METAL TREADS


## Durable epoxy grit surface strip for long-lasting performance.

Outdoors in rugged conditions, indoors in industrial or commercial applications, FlexTerior treads offer a gripping surface strip that's made to last. Made of exterior-grade aluminum and inlaid with an epoxy and abrasive grit blend, FlexTerior treads are ideal for installation on new or existing stairs and landings and meet ADA recommendations for slip resistance.

### A full metal tread system.

Flexco offers FlexTerior metal nosings, treads and flat steps to provide you a complete metal tread system. Each product is constructed of heat-treated exterior grade aluminum which is resistant to most elements of corrosion. An inlaid anti-slip epoxy color coating is colorfast and resistant to marring, scratching and chipping. Nosings are available in 4-inch depths. Treads are available in 9-inch and 11-inch tread dimensions. Flat steps are available, upon request.

- Corrosion-resistant 6063T3 aluminum construction
- Inlaid with durable epoxy and abrasive grit
- Multiple epoxy strip color options
- ~ Double grit strip available in black and one accent color
- Pre-drilled, countersunk holes

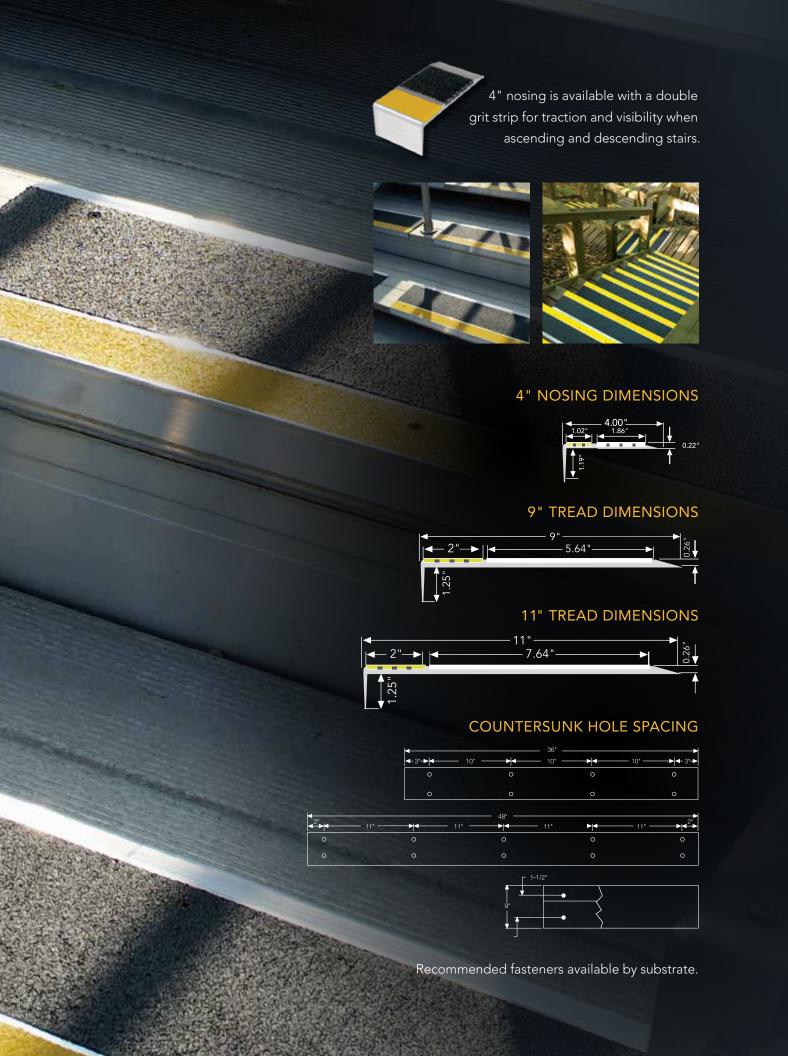

#### Choose the metal tread that meets your exact specification.

FlexTerior treads are available in seven standard colors and unlimited custom color options. With our exceptional dual-channel face design, this allows you to create numerous color combinations.

#### PRODUCT DETAILS

1/4" Overall Gauge 4", 9", Plus 11" Depth

36", 48", Over 48" Special Order Lengths

Nose Square

Pieces / Carton 6, Special Order TBD Weight / Lin. Ft. (lb.) 2.2 for 9" or 2.76 for 11"

Screw Packaging 36" (9 / Set)

48" (13 / Set)

Order Prefix FLEX (FlexTerior Metal Tread)

Custom lengths are available in 1" increments. Custom-colored epoxy inlay is available


for an additional charge.

Note: Must indicate concrete or wood installation for proper mechanical fasteners. A premium-grade, exterior polyurethane adhesive approved by the adhesive manufacturer for bonding aluminum directly to concrete, exterior-grade plywood or metal is required.

Leave room for contraction and expansion of treads when taking measurements for depth and length.

#### ANTI-SLIP EPOXY COLORS

Double grit strip includes black and one accent color. Seven accent colors available.









Sunshine\*



Coal\*

\*Coal / Coal and Coal / Sunshine color combinations, in stock. All other combinations are special order. Color selections must be made from actual samples.



For more information, visit flexcofloors.com or contact your Flexco distributor.

For samples, call 1-800-633-3151 or visit flexcofloors.com/samples.

